

The Edging Experts

DATA SHEET



Bulldog-Edg™

FLEXIBLE 1.75 INCH HIGH PAVER EDGING

1-800-EDGINGS
(334-4647)

edgings@olyola.com
www.olyola.com

PAVER RESTRAINT

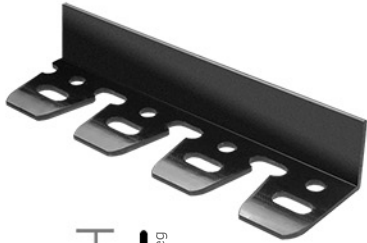


The strongest paver restraint in Oly-Ola's line, Bulldog-Edg™ features a thicker PVC construction that makes it ideal for extra heavy-duty hardscape construction projects such as driveways and patios. Bulldog's one-piece design flexes without snapping or cutting to make tight curves. Its simple, yet effective, design makes it the perfect choice for serious hardscaping professionals.


And, as with all Oly-Ola paver restraints, Bulldog-Edg™ is made with 100% recycled, high grade PVC without fillers or blown in material. It can be installed under or outside the paver.

Available in flexible style,
7.5 ft. or 15 ft. lengths


SPECIFICATIONS	
Material:	Black rigid polyvinyl chloride (PVC), carbon black concentrate and impact modifier
Packaging:	15 foot - 6 pieces per bundle (90 ft.) 7.5 foot - 12 pieces per bundle/box (90 ft.)
Each Piece Includes:	Paver restraint only - steel stakes and H-clips sold separately at discount
Average Wall Thickness:	Vertical Leg = .175 - .185 inches Horizontal Leg = .145 - .155 inches
Dimensions Per Piece:	Depth = 1.75 inch vertical leg Width = 2.75 inch horizontal leg
Approx. Weight:	15 ft. piece: 5.6 lbs. bundle: 34 lbs. 7.5 ft. piece: 2.8 lbs. bundle: 34 lbs. 7.5 ft. box: 39 lbs. (includes stakes)
Connection Type:	H-Clip - Use PVC glue for permanent hold
Can be Formed with Heat:	Yes - heat gun or propane torch
Available Styles:	Flexible only

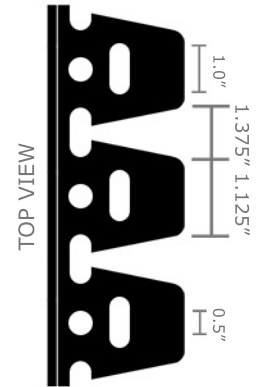

With Bulldog-Edg's L-shaped design, you have install options.

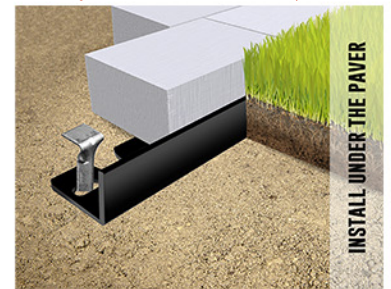

INSTALL UNDER THE PAVER

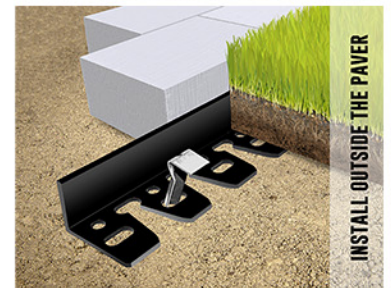

INSTALL OUTSIDE THE PAVER

Installation Guidelines & Tips

BASICS

Install the bricks or pavers according to the manufacturer's guidelines. If installing underneath the pavers, measure the final row of pavers before securing the paver restraint. When installing outside the pavers, simply butt the restraint up against the pavers. Once in place, secure the restraint with steel stakes.

STAKING

Secure the restraint by staking it every 2 feet at minimum through the holes provided on the horizontal leg. When installing the restraint outside of the pavers, pound the stake at a 45 degree angle toward the pavers. When installing the restraint underneath the pavers, stake at a 90 degree angle until the top of stake is flush with the horizontal leg. Use extra stakes when securing joints and curves. Do not make the mistake of using too few stakes, especially when the ground is exposed to cold temperatures.



Since our paver restraints are made of true PVC, they can be heated with a propane torch or heat gun and then bent to form 90 degree corners and other angles. Be sure to practice your technique on scrap pieces before applying it in the field.

CONNECTOR:

H-CLIP



This H-clip can be used with each of Oly-Ola's paver restraints. Use PVC cement at the joint for a permanent hold.



Oly-Ola's 9.25 in. Non-bending Steel Stake

Discover
THE OLY-OLA
EDGE